




## UNDINE® HD washing cabinet before Scalding incl. vent- and leg cleaning (narrow) PL003A

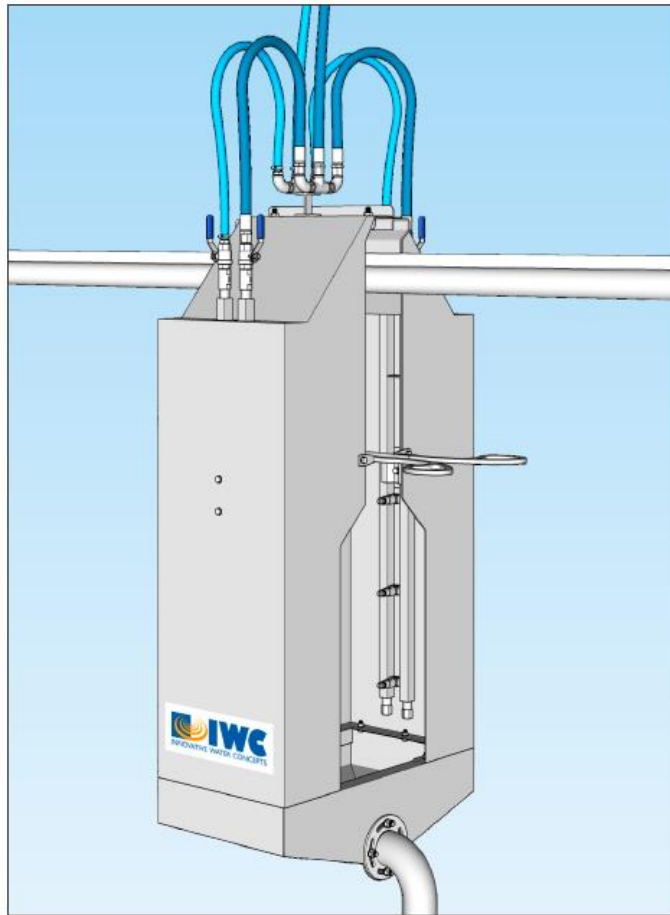

### HIGHLIGHT FEATURES

- Excellent hygienic performance
- 50% saving on water; capacity up to 15.000 bph
- Less contamination in Scalding & better pluck results
- Including vent- and leg cleaning

### TECHNICAL DATA

Article No.: HD.400.BFSC.2x4.2x2

Undine stainless steel cabinet 400 x 660 x 1500 (l x w x h)

2 x Undine Manifold-4 and 2 x Undine Manifold -2

2 x 2 non-return valves ½"

2 x 2 hand ball valves

2 x 1000 mm high pressure water hose incl. swivels ½"

2 x 1000 mm low pressure air hose (10 bar)

1 x water/air distribution block ½"

1 x drain pipe

1 x G-rail 600 mm

2 x shackle guide rails



Water consumption/ pressure:  
± 1.400 -1.600 per hr./ 10 bar



Air consumption/ pressure:  
± 300 liter per min./ 6-8 bar

+ 31 (0)527 745 932

info@iwc-international.com

www.iwc-international.com