UNDINE® HD washing cabinet before Scalding (Turkey) PLT002

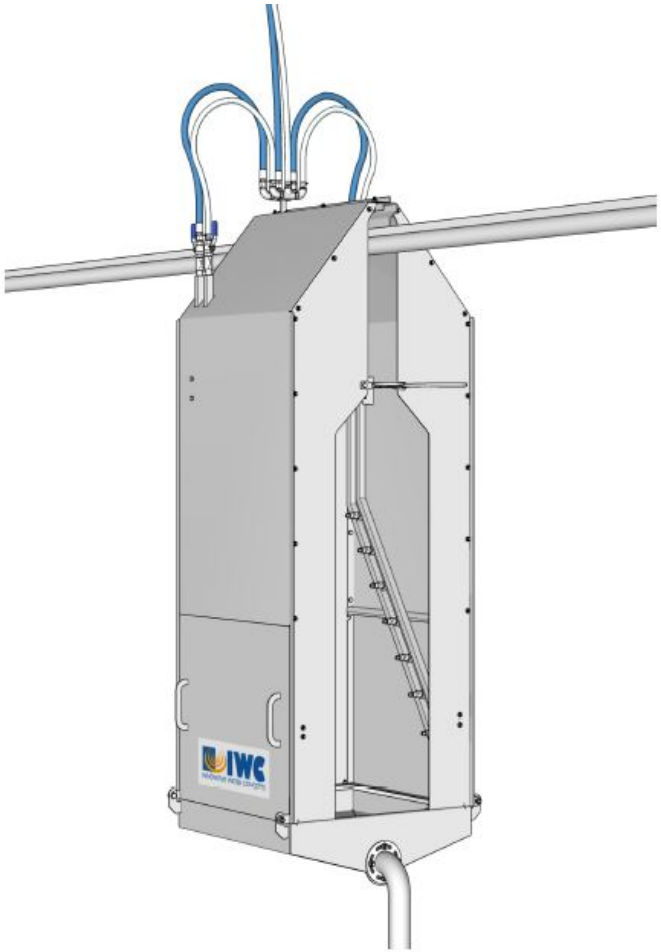

HIGHLIGHT FEATURES

- **Excellent hygienic performance**
- **50% saving on water**
- **Less contamination in scolding & better pluck results**
- **Capacity up to 5.000 bph**

TECHNICAL DATA

Article No.: HD-900-TURKEY-BFSC-2x8

Undine stainless steel cabinet 900 x 770 x 2300 (l x w x h)

2 x Undine Manifold-8

2 x 2 non-return valves ½”

2 x 2 hand ball valves

2 x 1000 mm high pressure water hose incl. swivels ½”

2 x 1000 mm low pressure air hose (10 bar)

1 x water/air distribution block ½”

1 x drain pipe

1 x G-rail 900 mm

2 x shackle guide rails

Water consumption/ pressure:
± 2.800 liter per hour/ 10 bar

Air consumption/ pressure:
± 800 liter per min./ 6-8 bar

+ 31 (0)527 745 932 info@iwc-international.com www.iwc-international.com

INNOVATIVE WATER CONCEPTS